


SONOleed®

SOUNDPROOFING MEMBRANE
FOR CERAMIC



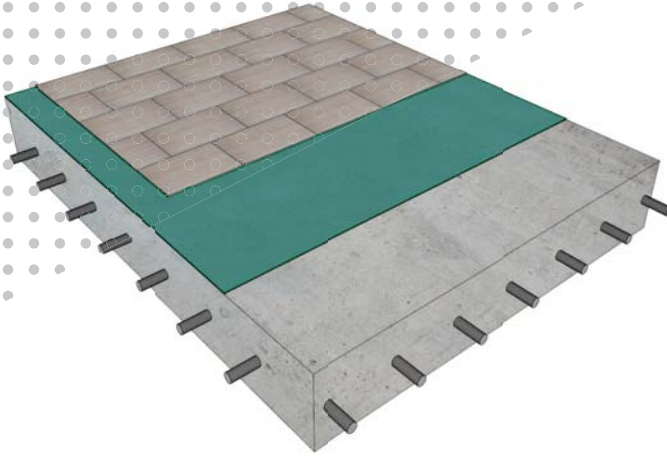

AIIC 59 ASTC 61

Products

Ceramic

SONOleed

Adhesive

Concrete


Thickness

9.53 mm (3/8")

2.7 mm (7/64")

3.18 mm (1/8")

203 mm (8")

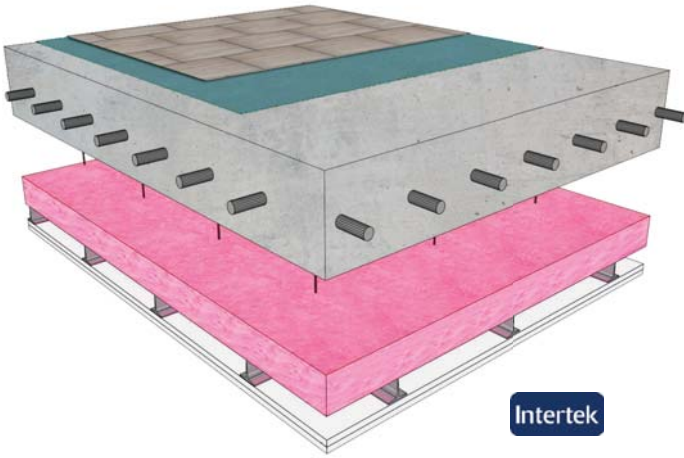

IIC 65 STC 64

Products

Ceramic

SONOleed

MSL S-63 adhesive

Concrete

Metal suspension

Insulation

U-Bar

Drywall

Drywall

Thickness

9.53 mm (3/8")

2.7 mm (7/64")

3.18 mm (1/8")

203 mm (8")

88.9 mm (3 1/2")

22.22 mm (7/8")

15.86 mm (5/8")

15.86 mm (5/8")

FEATURES

- High performance soundproofing membrane designed for ceramic floors
- Continuous soundproofing barrier
- Decoupling membrane
- Long-term performance – Stable dimensions
- Light and easy to install
- Manufactured in Canada

PROPERTIES

Robinson test	ASTM C-627	Passed cycles 1 to 14 - Residential to heavy commercial
Crack isolation test	ANSI A118.12	Passed
Roll size	1.47 m x 15.24 m	58 in x 50 ft
Area covered/roll	22.45 m ²	241.67 ft ²
Thickness	2.72 mm	0.10 in
Weight/roll	8.3 kg	18.4 lb
Number of rolls/skid	25	

100% recycled polyester fibre

0% VOC – Volatile organic compounds

Projet: Paton 1, Jadco construction





MSL

Customer service
1 800 561-4279
www.mslfibre.com