



SOUNDPROOFING MEMBRANE
FOR LVT/LVP/SPC VINYL, CARPET, GLUED
AND FLOATING WOOD FLOORS

FEATURES

- High performance soundproofing membrane for LVT/LVP/SPC vinyl, carpet, glued and floating wood floors
- Continuous soundproofing barrier
- Decoupling membrane
- Long-term performance – Stable dimensions
- Light and easy to install
- Developed in Canada


PROPERTIES

Roll size	1.47m x 15.24 m	58 in x 50 ft
Area covered/roll	22.45 m ²	241.67 ft ²
Thickness	2.62 mm	0.10 in
Weight/roll	7.8 kg	17.2 lb
Number of rolls/skid	25	
100% recycled polyester fibre		
0% VOC – Volatile organic compounds		

MSL


Customer service
1 800 561-4279
www.mslfibre.com



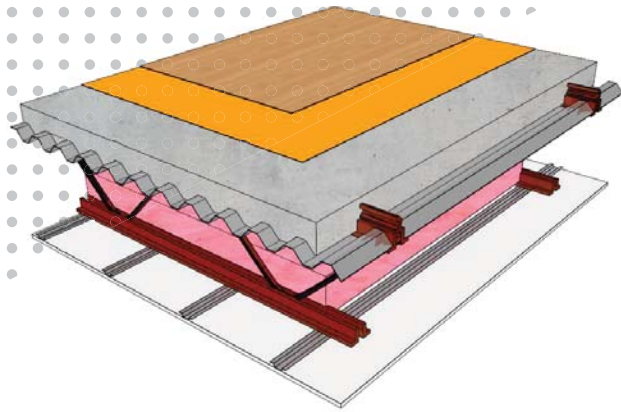

AIC 68 ASTC 60


Products	Thickness
Vinyl LVT/LVP	3 mm (1/8")
SONOvib	2.62 mm (7/64")
Concrete	101 mm (4")
Steel deck	
Steel joist	304.8 mm (12")
Insulation	152.4 mm (6")
Metal channels	12.7 mm (1/2")
Drywall	15.86 mm (5/8")

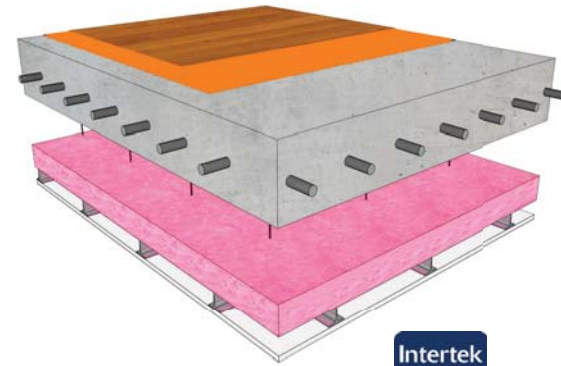

Intertek

IIC 68 STC 64

Products	Thickness
Vinyl LVT/LVP	3 mm (1/8")
SONOvib	2.62 mm (7/64")
Concrete	203 mm (8")
Metal suspension	
Insulation	88.9 mm (3 1/2")
U-Bar	22.22 mm (7/8")
Drywall	15.86 mm (5/8")

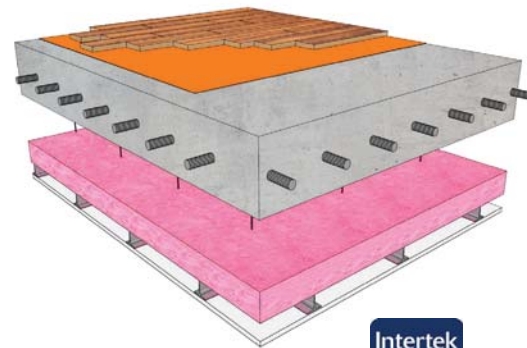

Intertek

IIC 64 STC 64

Products	Thickness
Engineered	
Hardwood flooring	12.2 mm (1/2")
MSL S-63 adhesive	3.18 mm (1/8")
SONOvib	2.62 mm (7/64")
MSL S-63 adhesive	3.18 mm (1/8")
Concrete	203 mm (8")
Metal suspension	
Insulation	88.9 mm (3 1/2")
U-Bar	22.22 mm (7/8")
Drywall	15.86 mm (5/8")

