


## Sheathing

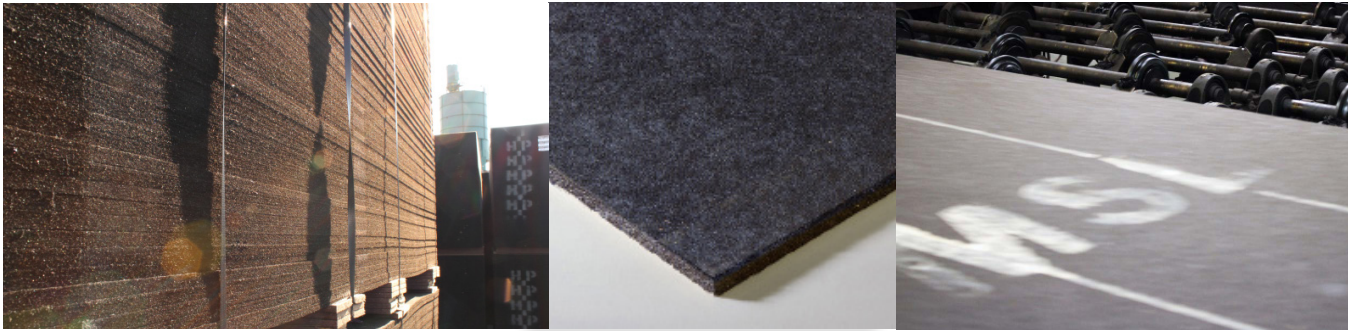

### Wood Fiber Insulation Coated 6 Sides

Properties	7 / 16"	1 / 2" HP
Density (ASTM D-1037)	<b>15 lbs / ft<sup>3</sup></b> <b>240 kg / m<sup>3</sup></b>	<b>16 lbs / ft<sup>3</sup></b> <b>256 kg / m<sup>3</sup></b>
Transverse load at rupture (ASTM C-209)	58N 13 lbF	67N 15 lbF
Tensile strength perpendicular to surface (ASTM C-209)	24 KPa 3.5 psi	24 KPa 3.5 psi
Tensile strength parallel to surface (ASTM C-209)	2050 KPa 297 psi	2200 KPa 319 psi
Water absorption (ASTM C-209)	6%	5%
Linear expansion (ASTM D-1037)	0.5%	0.5%
Compressive strength (10% deformation) (ASTM C-165)	<b>310 KPa</b> <b>45 psi</b>	<b>379 KPa</b> <b>55 psi</b>
"R" factor / inch (1") Min 0.455 [(m <sup>2</sup> • K)/w] (ASTM C-518)	<b>3.1</b>	<b>3.0</b>

Thickness	Dimensions	Edges	Codes
<b>7/16"</b> (11 mm)	<b>4' X 8'</b> (1.22 m x 2.44 m)	<b>Square</b>	<b>874</b>
	<b>4' X 9'</b> (1.22 m x 2.44 m)	<b>Square</b>	<b>894</b>
<b>1/2"</b> (12.7 mm)	<b>4' X 8'</b> (1.22 m x 2.44 m)	<b>Square</b>	<b>875 HP</b>
	<b>4' X 9'</b> (1.22 m x 2.44 m)	<b>Square</b>	<b>895 HP</b>

The information on this Technical Data Sheet is based upon data considered to be true and accurate, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate. This product conforms to all requirements of **CAN / ULC-5706-09**.

CCMC #: 12198-L (Code 874 and 894 only)



infoplus@mslfibre.com • www.mslfibre.com

For information: contact our customer service 1.800.561.4279